



NOCTURN XS

SPECIFICATIONS




Features

- Ideal for 24/7 operations
- Less than 4e-read-out noise
- 860 nm and 1064 nm laser line detection
- 1.3 Mpx
- 100 fps
- Digital zoom up to 8x

Camera	Specifications
Resolution	1280 x 1027 Pixels
Pixel Pitch	9.7 μm x 9.7 μm
Well Capacity	> 25000 e-
Dynamic Range	> 60 dB
Read Noise	< 4e- median at 60 Hz
Quantum Efficiency	> 60% at 600 nm
Frame Rate	50, 60, or 100 Hz with full field resolution (user selectable)
Image Lag	< 0.1%
Shutter Mode	Rolling
Features	
Imaging Start Up Time	< 5 sec
Image Correction	Bad pixel replacement and 2 points non-uniformity correction (NUC)
Gain Control	Automatic gain and exposure control or manual
Synchronization	Frame start trigger (2 to 12 V) - Analog output strobe reference (2 to 12 V)
Windowing	Full field of view down to 1/2 vertical resolution
On-Screen Display	Full on-screen display capability with text, standard geometrical shapes and graphics
Digital Zoom	Up to 8X (0.001 increment resolution)
Contrast Enhancement	Contrast stretching, equalization and adaptive equalization
Snapshots	On-board capture of *, JPG (8b) or *, PGM (8/10b)
Housing	
Dimensions (excluding connectors) (Width x Height x Depth)	34.1 mm x 36.6 mm x 17.3 mm
Weight	< 45g

Quantum Efficiency Curve shows > 60% at peak with microlenses

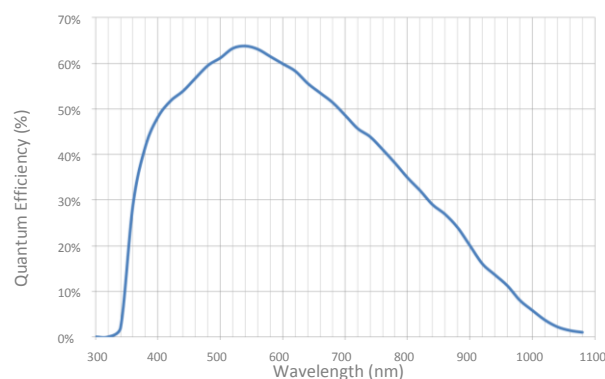

PHOTONIS DIGITAL IMAGING, LLC.
1000 New Holland Avenue, Lancaster, PA 17601-5688, USA,
T: 1800 366 2875 (toll-free US/Canada) T: +1 717 295 2704
E: digitalvision@photonis.com W: www.photonisusa.com

PHOTONIS Fance SAS,
Avenue Roger Roncier
19106 Brive, France
T: +33 (0)555 86 37 00


PHOTONIS Netherlands BV
Dwazieweg 2
9301 ZR Roden, The Netherlands
T: +31 (0)505 01 88 08

PHOTONIS
Digital Vision

The information furnished is believed to be accurate and reliable, but is not guaranteed and is subject to change without notice. No liability is assumed by PHOTONIS for its use. Performance data represents typical characteristics as individual product performance may vary. Customers should verify that they have the most current PHOTONIS product information before placing orders. No claims or warranties are made as to the application of PHOTONIS products. Pictures may not be considered as contractually binding. This document may not be reproduced, in whole or in part, without the prior written consent of PHOTONIS.



Input/Output	
Digital Video Output	CameraLink® Compatible or parallel LVCMOS
Communications	Logic Level serial port
Synchronization	LVTTTL output
Environmental and Power	
Operating Temperature	-40° C to +60°C
Storage Temperature	-50° C to +80° C
Input Voltage	2.25 to +5.5 VDC
Power (typical)	< 1.5 W

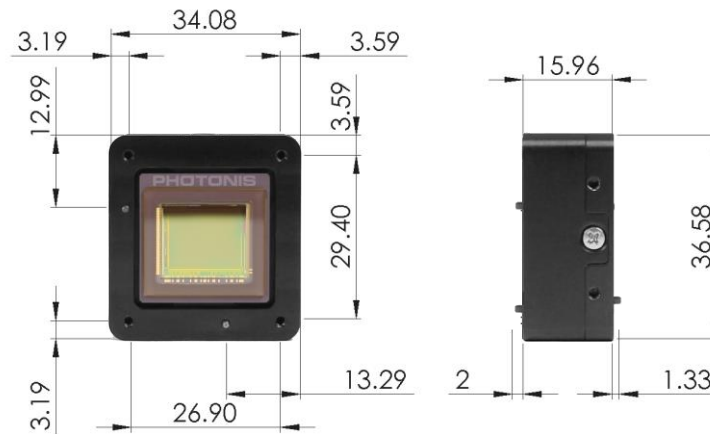Mechanical Dimensions for XS Camera Body (in mm)

NOCTURN XS Camera is powered by the LYNX CMOS imaging sensor, optimized for low light level imaging.

The LYNX CMOS imaging sensor is the first operational sensor specifically designed with Night Vision, Homeland Security and Surveillance applications in mind.

This fully solid-state CMOS sensor provides excellent imaging across varying light conditions, from daylight to low-light levels such as those found during a quarter moon.

The LYNX CMOS imaging sensor provides full SXGA resolution at 100 frames per second, with < 4e- read out noise and without cooling.



LYNX